



KENEX™ TEMPO

HOMOGENEOUS VINYL

 **Medsom**®

KENEX™ TEMPO

HOMOGENEOUS DIRECTIONAL


Size:2.0mm x 2m x 20m



KN-3610 Grim Grey




KN-3640 Manatee

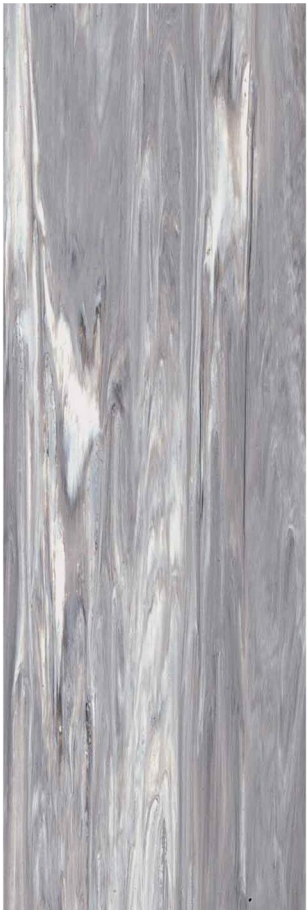

KN-3660 Silver Foil



KN-3659 Gainsboro



KN-3609 Platinum



KN-3602 Lumber



KN-3607 White Coffee



KN-3633 Dark Vanilla



KN-3603 Caramel



KN-3635 Champagne




KN-3632 Arylide Yellow



KN-3655 Mandarin

KENEX™ TEMPO

HOMOGENEOUS DIRECTIONAL

 Size:2.0mm x 2m x 20m



KN-3604 Pearl Aqua




KN-3637 Opal



KN-3657 Jet Stream



KN-3606 Periwinkle

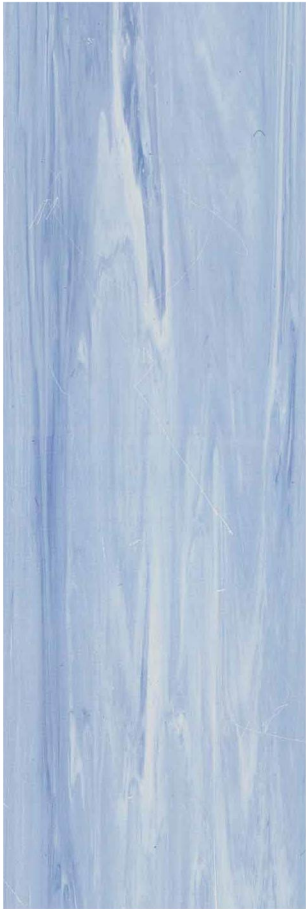

KN-3636 Bridal Blue



KN-3656 Beau Blue



KENEX™ TEMPO is available in 18 directional trendy designs. The special PUR surface treatment offers extreme resistance to cratth. stain. and abrasion resistance for heavy-traffic areas. giving it the best cost-effective performance on the market.



Stain Resistance



Scratch Resistance



Wear Resistance



Ultra Matte

KENEX™TEMPO

HOMOGENEOUS VINYL

DESCRIPTION	STANDARD	UNIT	RESULT
Type of floor covering	ISO 10581 / EN 649	-	Homogeneous Vinyl Flooring
Total thickness	ISO 24346 / EN 428	mm	2
Width of sheet	ISO 24346 / EN 426	m	2
Length of sheet	ISO 24346 / EN 426	m	20
CLASSIFICATION			
European classification	ISO 10784 / EN 685	class	34-43
Reaction to fire	EN 13501 - 1	class	Bfl-s1
	GB 8624 - 2012	-	B1(B-s1,t0)
Toxic testing	GB 18586 - 2001	-	Qualified
Static electrical propensity	EN 1815	KV	≤2
Slip resistance	DIN 51130	class	R9
PERFORMANCES			
Type binder content	ISO 10581 / EN 649	type	II
Dimensional stability	ISO 23999 / EN 434	%	≤0.4
Residual indentation	ISO 24343-1 / EN 425	mm	≤0.1 (≈0.05)
Flexibility	ISO 24344 / EN 435	-	No Cracking
Thermal conductivity	ISO 10456 / EN 12524	W/(m.k)	≈0.25
Castor chair test	ISO 4918 / EN 425	-	OK
Colour fastness to light	ISO 105 - B02	degree	≥6
Chemical resistance	ISO 26987 / EN 423	-	Very good
Bacteria resistance	ISO 846 - 2019	-	Does not support growth
Surface treatment	MaxShield™		
Logistics information	<div><div>2mx20mx2.0mm</div><div>16 Rolls/Pallet</div><div>10Pallets/6400m²</div></div>		

ADVANTAGES

Eco-Friendly

Easy Maintenance

Super Wear-resistant

Anti-slip

Sound Absorbing

Anti-bacterial

APPLICATION

Healthcare

Education

Offices

Shopping Malls

Transportation

Factories

*The sample is only used as a reference for color selection. The color may slightly different from the actual samples.

*The above technical parameters are typical test results under laboratory standard test conditions.

*If you have special requirements for a certain technical parameter, please discuss the specific details with our company when ordering.

