

TERREN CALMO

HETEROGENOUS VINYL FLOORING



TERREN CALMO

Terren series is unique, high-performance compact vinyl sheet in a multi-layer construction. It combines high functionality with a wide range of attractive patterns and color choices. It is very suitable for the needs of commercial interiors.

FEATURES

☑ Highly Durable

Durable and permanently dimensionally stable with minimal residual impression

☑ Simple Maintenance

The UV coating finish ensures a natural appearance and makes cleaning easier

☑ Easy Installation

Easy and quick to lay with minimal joints

☑ Modern Design Selection

Wood, stone and abstract looks meet all aesthetic requirements in a wide range of applications

☑ Health and Eco-friendly

100% phthalate-free and low-emission



STRUCTURE

- 1 UV Coating
- 2 PVC Wear Layer
- 3 Printed Layer
- 4 Dimensional Layer
- 5 Compact Layer



Terren Calmo



Heterogenous Vinyl
Size:2.0mmx2mx20m



TC-2501



TC-2402



TC-2403



TC-2404



TC-2405



TC-2406



TC-2407



Terren Calmo



Heterogenous Vinyl
Size:2.0mmx2mx20m



TC-2408



TC-2409




TC-2410



TC-2411



TC-2412

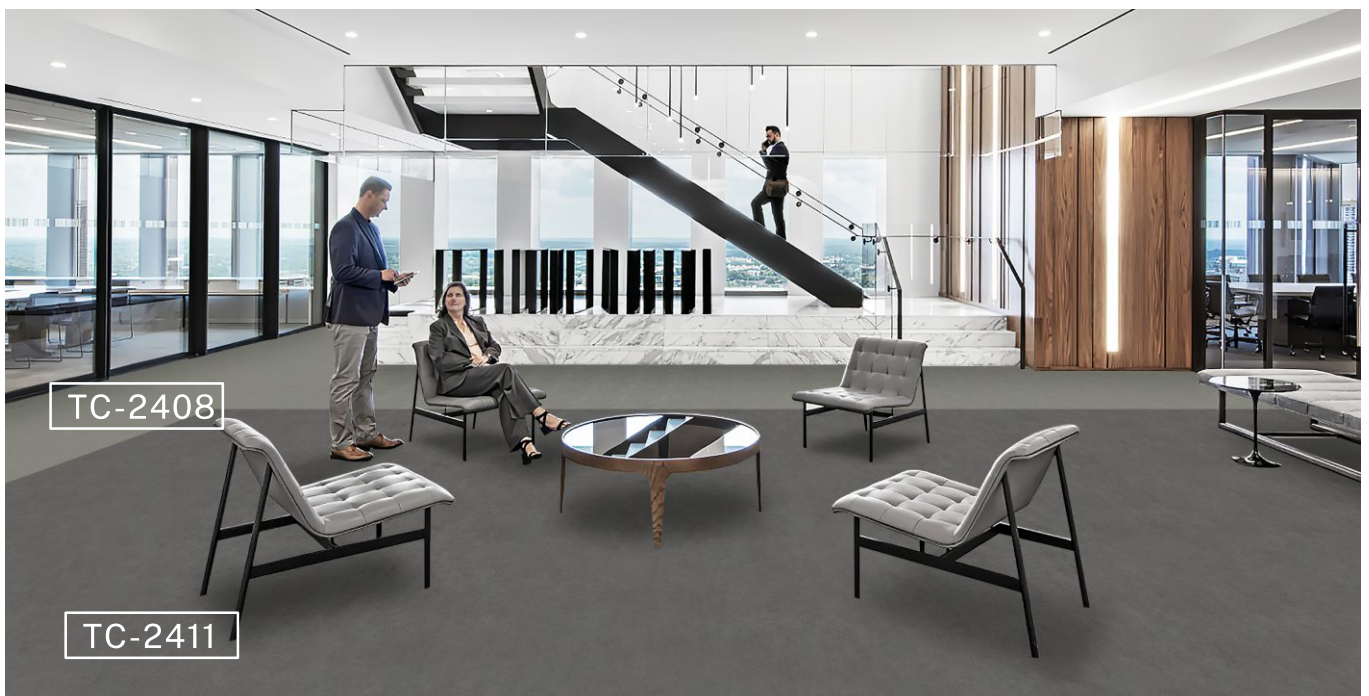

Terren Calmo



Heterogenous Vinyl
Size:2.0mmx2mx20m



TC-2412



TC-2413



TC-2414



TC-2415



TC-2416




TC-2417

Terren Calmo



Heterogenous Vinyl
Size:2.0mmx2mx20m

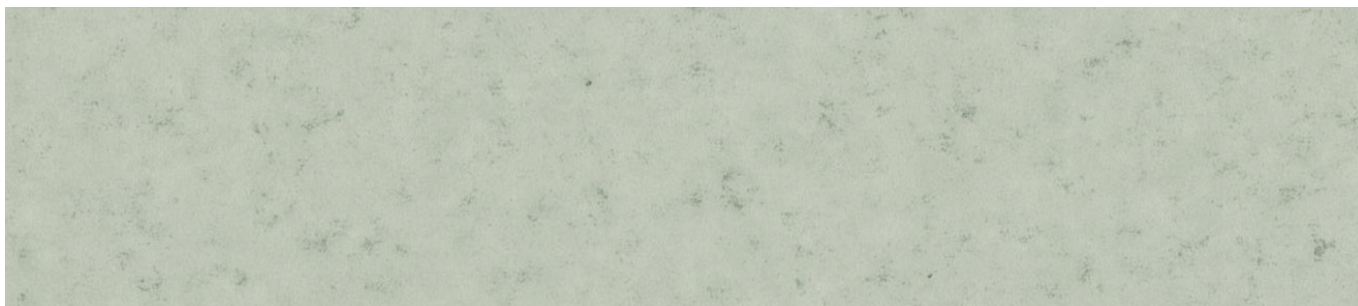

TC-2418




TC-2419



TC-2420




TC-2421

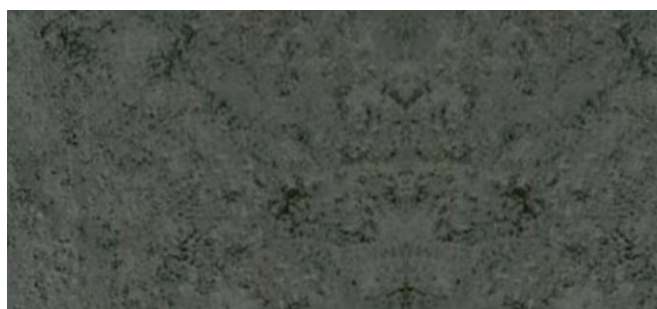

TC-2422



TC-2423

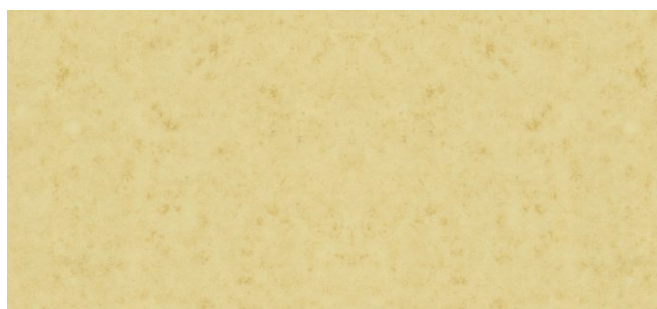

TC-2424



TC-2425



TC-2426


Terren Wood




Heterogenous Vinyl
Size:2.0mmx2mx20m




TC-2427

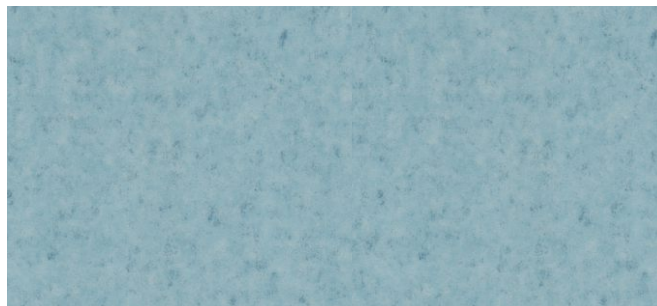


TC-2428

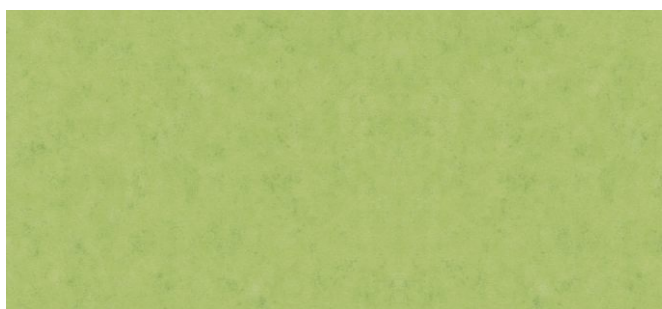

TC-2429

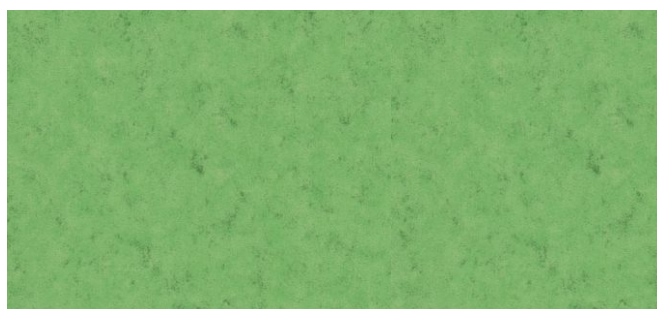

TC-2430

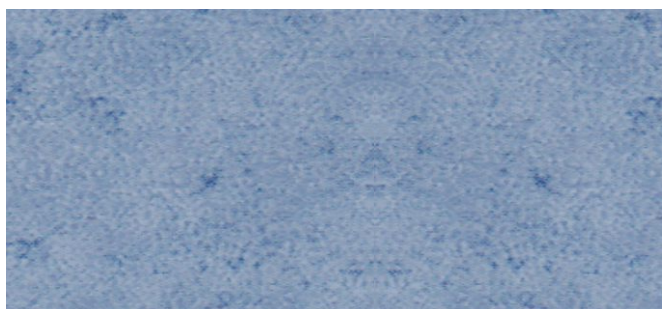














TC-2431



TC-2432



DESCRIPTION	STANDARD	SYMBOL	RESULT
Surface treatment			UV
Total thickness	EN 428		2.0mm
Wear layer thickness	EN 429		0.35mm
Weight	EN 430		3250g/m ²
Width of sheet	EN 426		2m
Length of sheet	EN 426		20m
Abrasion group	EN 660		T
Dimensional stability	EN 434		≤0.1%
Residual indentation	EN 433		≤0.1mm
Castor chair test	EN 425		OK
Colour fastness to light	ISO 105 - B02		≥6
Slip resistance	DIN 51130		R9
Impact sound resistance	EN ISO 717-2		19dB
Staining resistance	EN 423		OK
Reaction to fire	EN 13501-1		Class: Bfl-s1
Toxic testing	GB/T 18586-2001		Qualified
European Classification	EN 685	 	Class 34 Commercial very heavy Class 43 Industrial heavy



Phthalate Free



Recyclable



Health & Safety



Medsom®